

Presentation to TEXAS II

Technical eXchange on AIS via Satellite II



Dr. Dino Lorenzini

Mr. Mark Kanawati

September 3, 2008

3554 Chain Bridge Road
Suite 103
Fairfax, Virginia 22030
703-273-7010

Report Documentation Page			Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 2008		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE Technical eXchange on AIS via Satellite II				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Space Quest 3554 Chain Bridge Road Suite 103 Fairfax, Virginia 22030				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES The original document contains color images.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES 18	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			



AO-27

- Founded 1994
- Based in Fairfax, Virginia
- Focused on microsatellite technologies. (37 spacecrafts to date)
- Built and launched Microsats for LatinSat, Aprize and AMSAT.
- Provides Microsat subsystems to NASA, Canadian Space Agency, US Air Force, US Navy, US Aerospace Corporations, Universities, and Foreign Space Agencies.
- Developed all avionics systems & software for Bigelow Aerospace.
- Conducted many component flight qualifications programs.



LatinSat



AprizeSat



Bigelow Genesis II

Objective

- Investigate the nature and characteristics of the AIS signals as seen in space.

Satellite Equipment

- Use a sensitive 2-channel VHF receiver, tap the IF, filter, down-convert to 57 KHz, and modulate the carrier of an S-Band transmitter.

Ground Equipment



- Use a wideband S-Band receiver on the ground, oversample with 16-bits at 111 kbps, and record the digital data.
- Reconstruct the original analog signal on the ground and decode the AIS packets using a standard AIS receiver.
- Process the digital samples to investigate various decoder algorithms to maximize the retrieval of AIS information.

SpaceQuest Microsatellite Bus


Mission:

Data Exfiltration with auxiliary AIS payload.

- 12 kg, 25 cm cubes
- 10+ years orbital lifetime
- Low-cost, high performance
- Inexpensive piggyback launch
- Autonomous operation
- Global Store and Forward Operation
- Communicates via data links with thousands of terminals worldwide




SpaceQuest AIS Payload Block Diagram

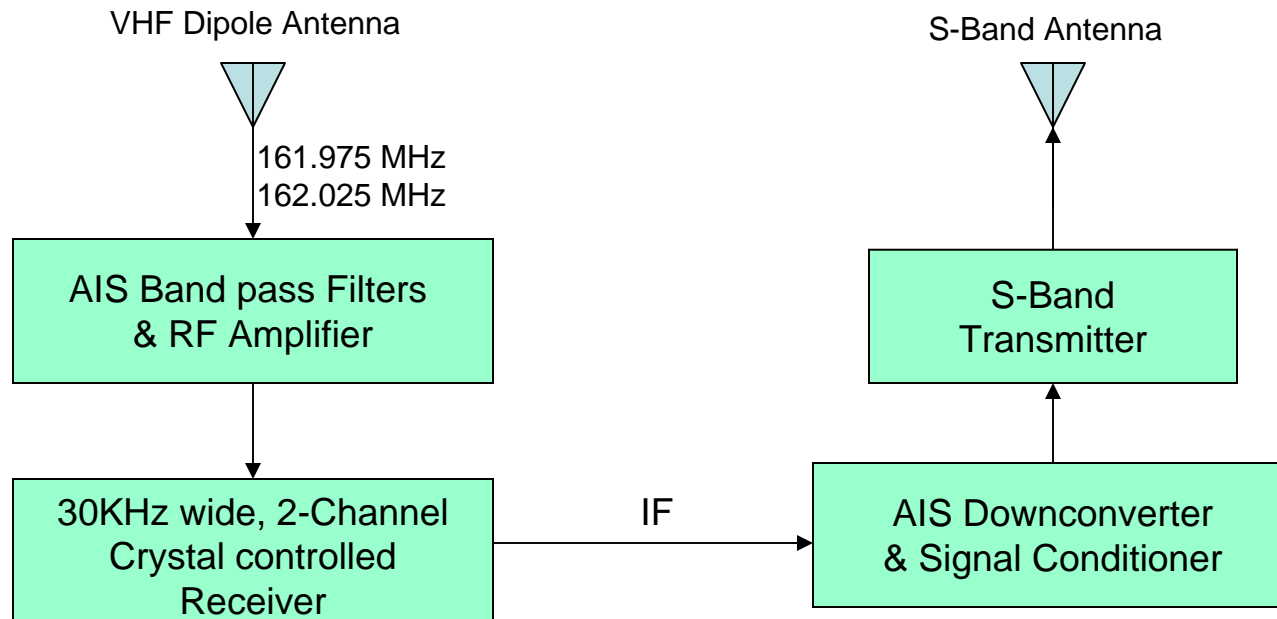

- 162 MHz receiver captures AIS signals
- Receiver IF used to modulate S-Band transmitter
- AIS signal contains corrupted packets, collisions, interference signals, and distorted signal transmissions.

SpaceQuest's AIS Equipment

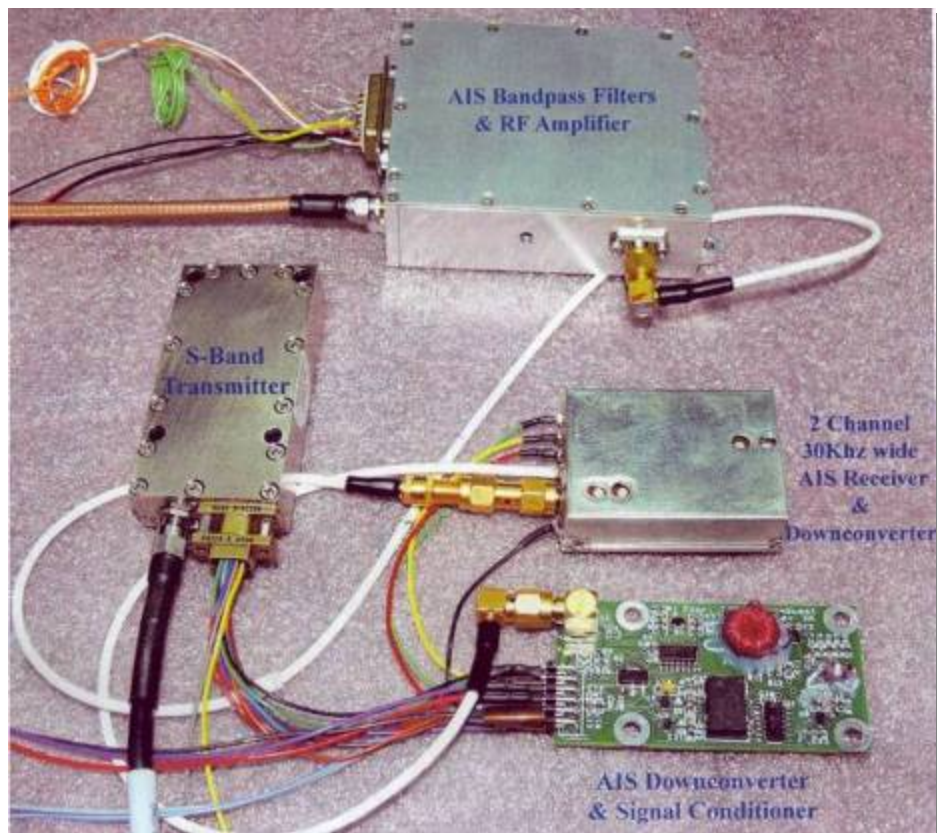


Satellite AIS Payload

S-Band Receiver & Digital Recorder






Power Spectral Density of S-Band Downlink

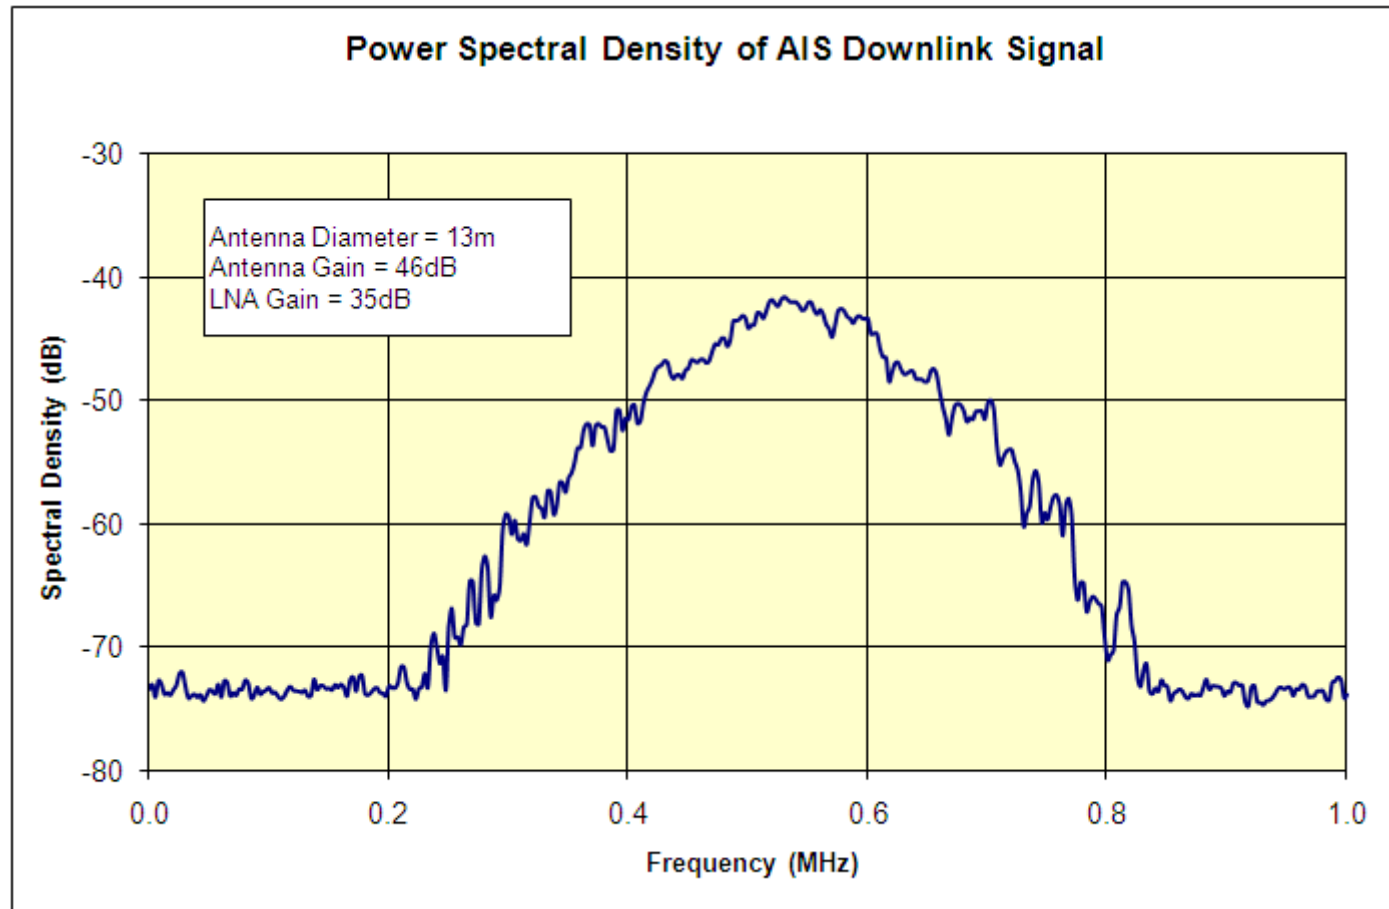


S-Band Antenna at Blossom Point

Spectral Plot of Wideband Analog Signal in AIS Band

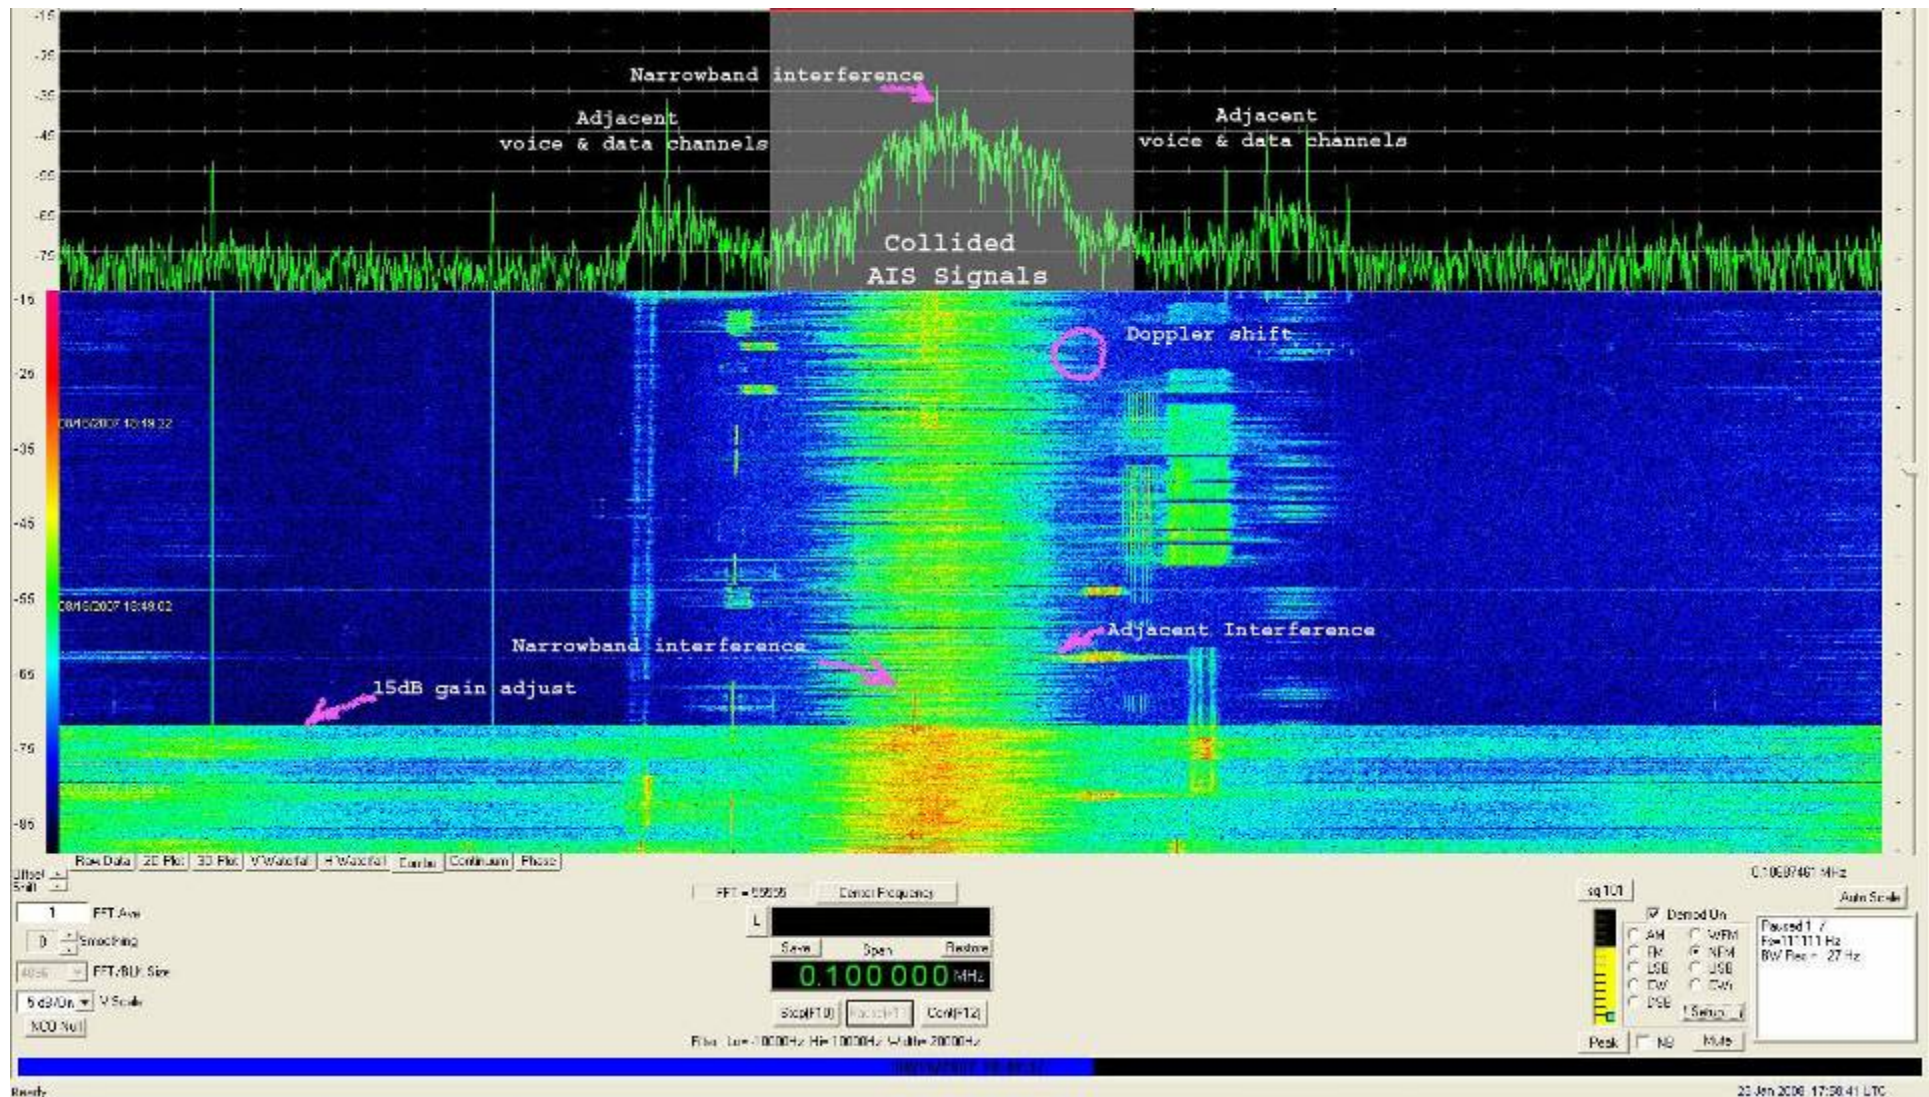

Analysis of Digitized AIS Signals from Space

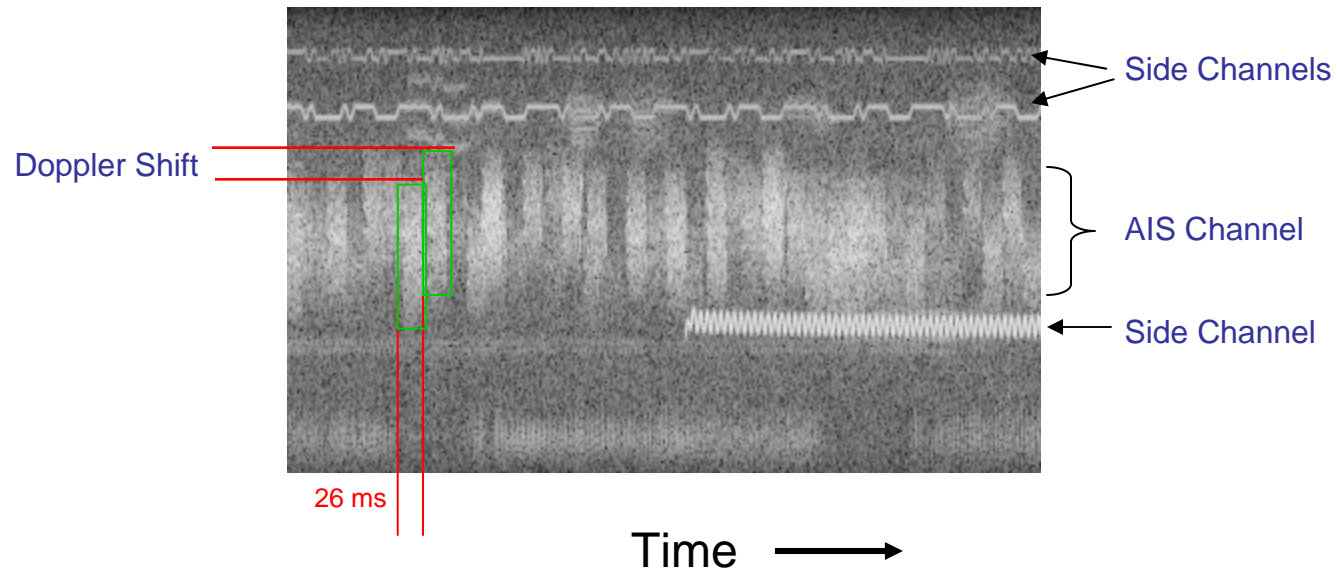


Digitized at 66 Mbps & Sampled at 110 kHz

26 ms


Decoded AIS Signals from a Satellite Pass over Atlantic Ocean




New Ships Received Each Minute

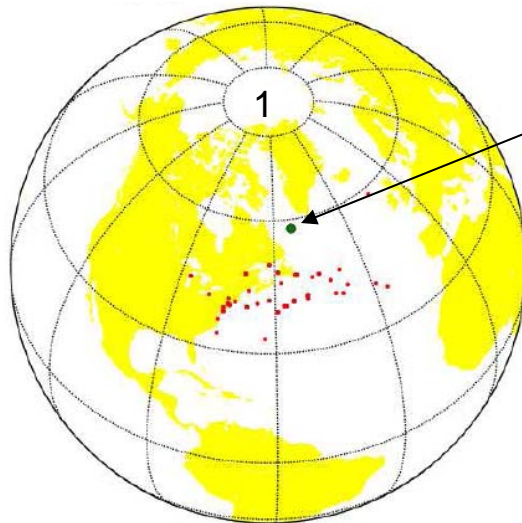


Minute #1: 43 New Ships

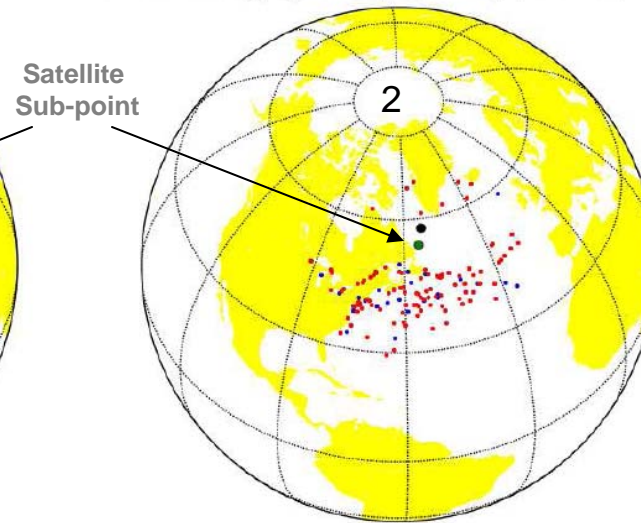


Minute #2: 139 New Ships

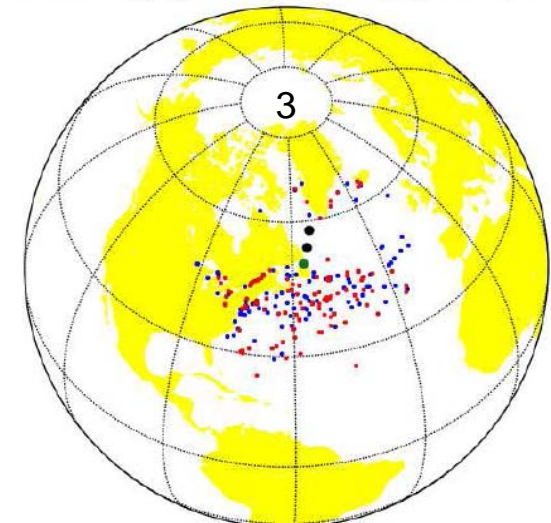


Minute #3: 133 New Ships

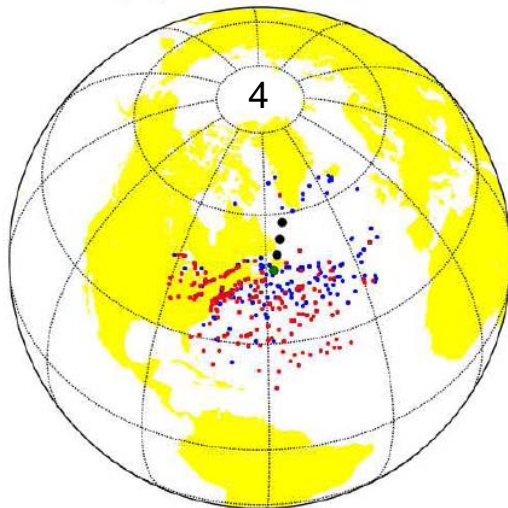

Minute #4: 303 New Ships

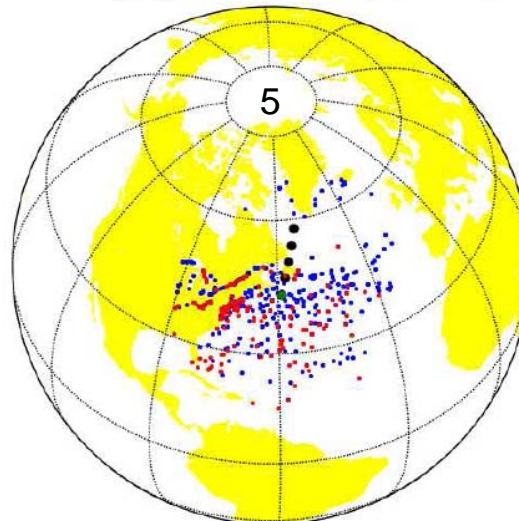


Minute #5: 240 New Ships

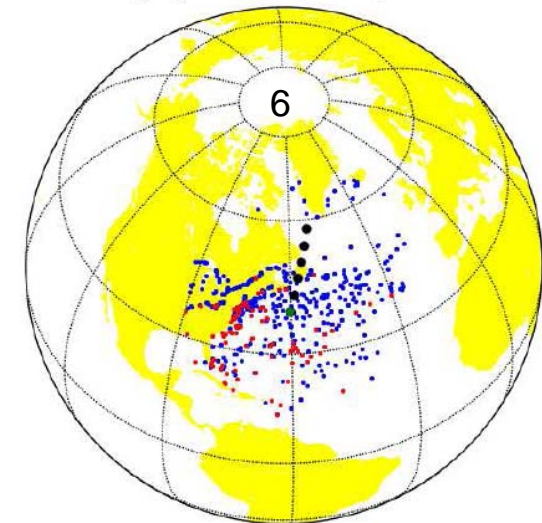


Minute #6: 131 New Ships


New Ships Received Each Minute

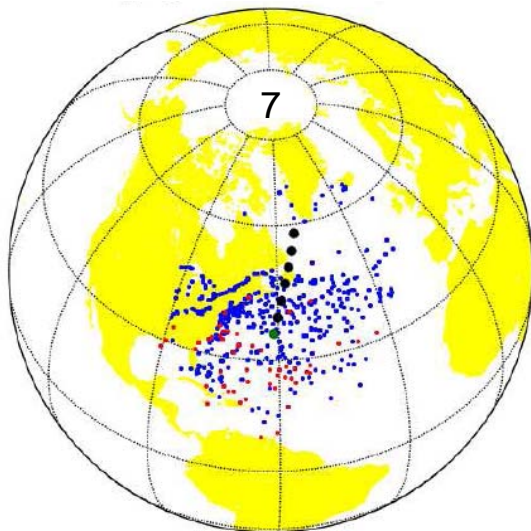


Minute #7: 57 New Ships

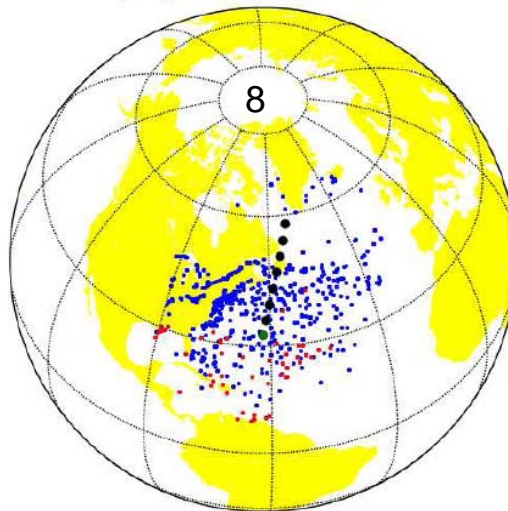


Minute #8: 55 New Ships

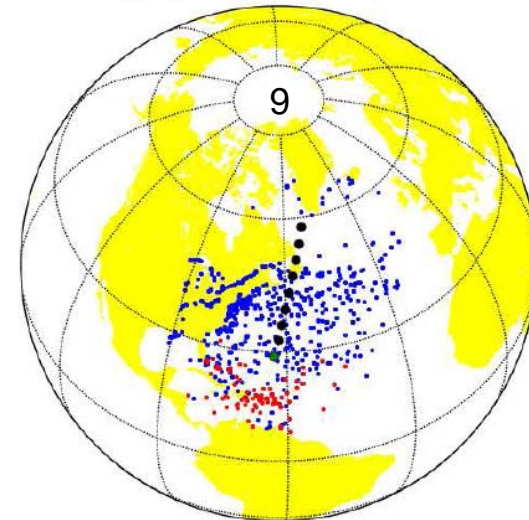


Minute #9: 118 New Ships

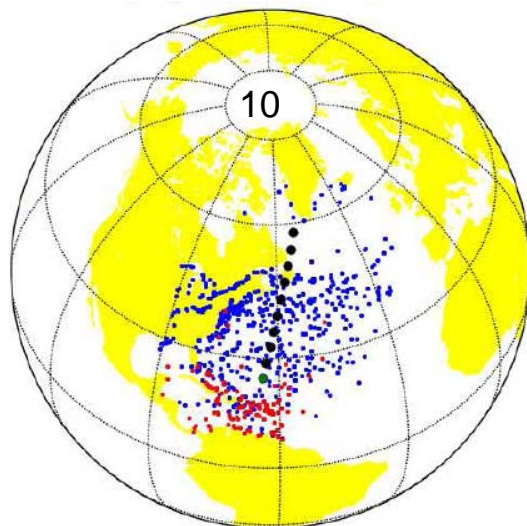

Minute #10: 164 New Ships

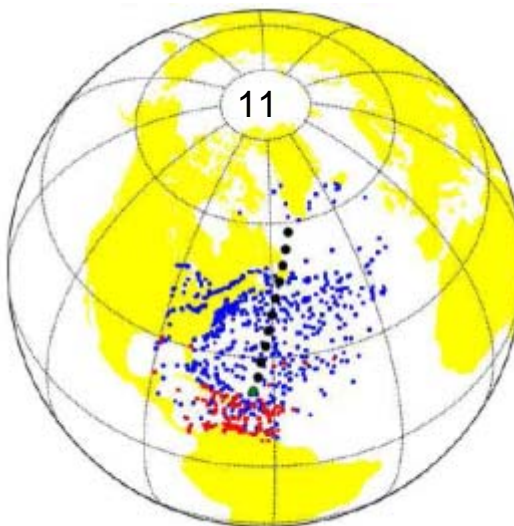

Minute #11: 168 New Ships

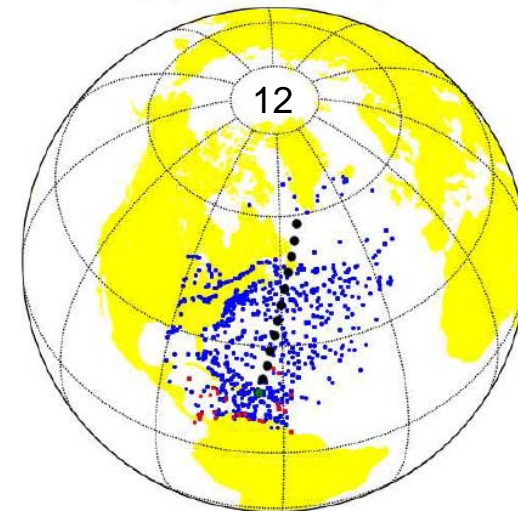

Minute #12: 29 New Ships

Test Setup in Riyadh, Saudi Arabia




AIS Results from Saudi Arabia Antenna



- SpaceQuest's experimental AIS payload provided high-fidelity AIS signals from space.
- Land-based interference appears to be more dominant than sea-based interference, especially south of the US and over Europe
- The data sampling rate and resolution can be substantially reduced to create smaller data files.
- The satellite transponder bandwidth can be reduced to 20 kHz to improve system performance, reduce the size of the recorded file, and allow the use of a UHF downlink.
- On-board sampling, storage, and data processing will permit worldwide collection of AIS data on a routine basis.

Block Diagram of Advanced AIS Payload

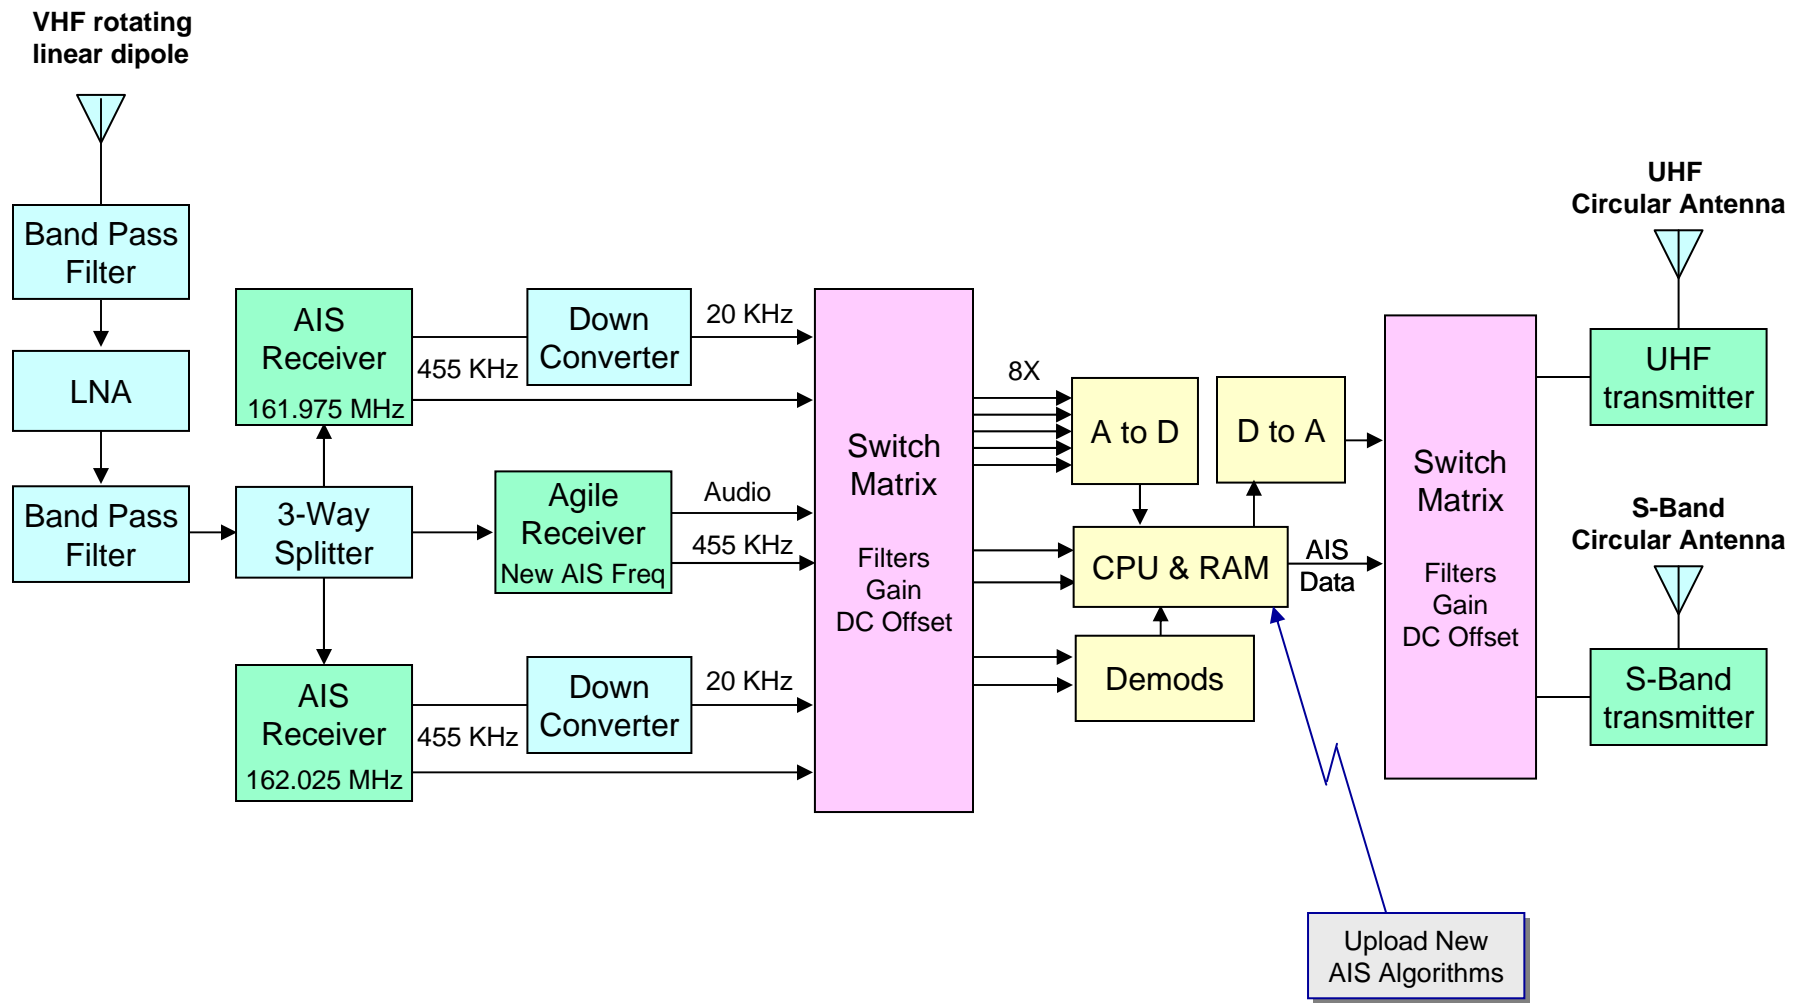

MHz

Some Accomplishments

- Received and recorded high-fidelity AIS signals from space in real time.
- Modified and assembled low-cost, portable, off-the-shelf ground station equipment to receive, digitize and store AIS signals from space.
- Observed the emissions and interference in both AIS channels as well as the adjacent channels from space.
- Recorded AIS emissions from open ocean and inland waterways during daytime and evening hours, and from the US west coast, east coast and the Middle East.
- Determined the aggregate energy level of the AIS signals in space into an omni-directional antenna.
- Validated and adjusted a space-based AIS payload.
- Decoded up to 2,000 ship transmissions during a 10-minute satellite pass.